

FRIONOR Dishwasher with reverse osmosis system


integrated softener and drain pump

R4127



- Integrated softener, reverse osmosis unit and drain pump
- Integrated rinsing fluid suction pump
- Energy saving
- Low operating cost
- Easy reverse osmosis disconnection for ironing in traditional washing

In the middle of a rush, this glass washer provides very fast performance and low water consumption. No more wiping for your staff. Perfect quality and attractive price.

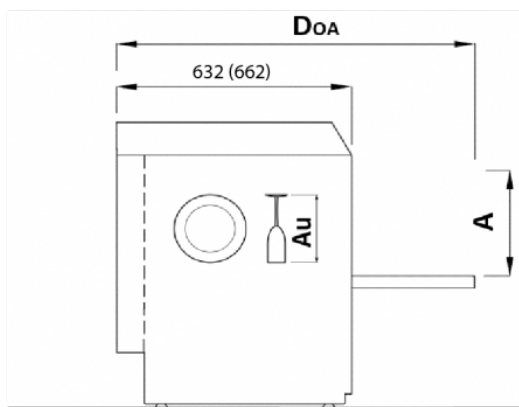

Technical Specifications

DIMENSIONS (MM)	
ADOUCCISSEUR	included
CAROSSERIE	
HAUTEUR PASSAGE VERRE (MM)	
DUREE DES CYCLES (SC)	60 -120 – 180 – 480
POMPE DE VIDANGE	included
DOSEUR PRODUIT DE RINCAGE	included
DOSEUR DE PRODUIT DE LAVAGE	
CAPACITE DE LA CUVE (L)	11
CONSO. EAU PAR CYCLE (L)	
NIVEAU SONORE (DB)	68
NOMBRE DE PANIER	
DIMENSION DES PANIERS (MM)	500 x 500
TEMPERATURE DE LAVAGE (°C)	
TEMPERATURE DE RINCAGE (°C)	
TEMPERATURE AMBIANTE (°C)	
TEMPÉRATURE ENTRÉ EAU (°C)	
DURETE EAU D'ALIM. (°DF)	
POIDS (KG)	65
ALIMENTATION	
PUISSANCE (KW)	
PRISE DE TERRE	Mandatory
INDICE DE PROTECTION	IPX1

To discover more about this product, scan this QR code.

