


FRIONOR hollow ice machine

Production 22 kg / 24h


R4016

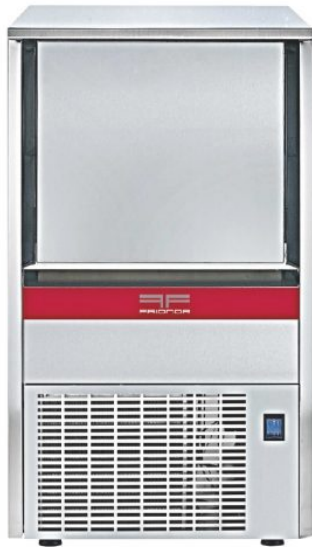

Small footprint
Low water consumption
Suitable for calcareous waters
Attractiveness and price

This professional ice maker has been designed for the hotel and restaurant sector: bars, restaurants, pubs... Its small size will be one of its undeniable assets. Thanks to its pallet system, this machine will be more resistant to limescale and will thus guarantee the quality of the ice cubes while ensuring low water consumption.

Depending on the hardness of the water, we recommend an anti-limestone filter upstream to prolong the durability of the machine.

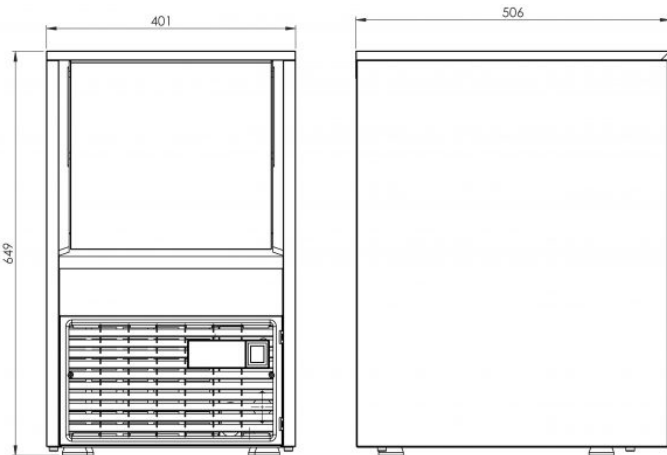

Technical Specifications

TYPE DE POSE	BUILT-IN
DIMENSIONS (MM)	L.401 x d.506 x h.643
TYPE DE GLAÇONS	
PIEDS REGLABLES	
CARROSSERIE	
PRODUCTION NB/GLACON PAR CYLE	15/ cycle
CAPACITE DE PROD. EN 24H (KG)	22
CAPACITE DE STOCKAGE (KG)	9
REFROIDISSEMENT	AIR
SYSTÈME FABRICATION GLAÇONS	Chip system
CONSOMMATION D'EAU (APPROX)	
TEMPERATURE AMBIANTE (°C)	
TEMPERATURE DE L'EAU (C°)	5 to 35
ALIMENTATION	
CONSOMMATION (WH)	
PRISE DE TERRE	Mandatory
FLUIDE FRIGORIGENE	R290
POIDS (KG)	

To discover more about this product, scan this QR code.

